



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Coaxial DC Block


Model RMDC.18000SMAmf

50ohm SMA

Frequency Range (MHz)	Insertion Loss (dB max)	Voltage Rating (V DC)	VSWR (max)	Power
DC-18000	0.5	200	1.35:1	10 W CW

Notes:

- a. Connector: SMA male/female
- b. Inner block
- c. Operation temperature: -55C to +85C deg
- d. Case material: stainless steel/passivate

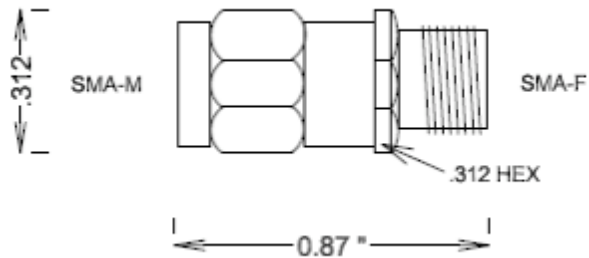

All specifications are subject to change without notice.

Dimensions: inches

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com

Rev 04/02/12