



9 4 J A C K S O N R O A D , S U I T E 1 1 0 , D E V E N S , M A 0 1 4 3 4



## TERMINATIONS

**Model RMTE.18000Nm2**  
**N male, Screw-on**

FREQUENCY (MHz)	POWER (Watt)(max)	POWER PEAK	IMPEDANCE (Ω)	VSWR (max)
DC – 18000	2	1Kw/50us	50	1.20 : 1

**Notes:**

- a. Case Materials/Plating:  
 Housing: Brass w/ternary alloy  
 Center Contact: Gold plated brass per MIL-G-45204  
 Resistive element: Thin film  
 Resistor substrate: Alumina
- b. Operation temperature: -55C to +125C
- c. Add a “c” suffix for optional bead chain

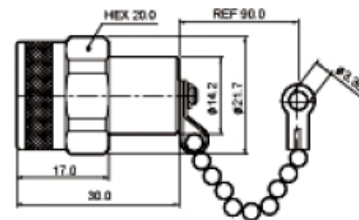

All specifications are subject to change without notice.


Telephone: 978-772-3767  
 772-3768

Fax: 978-

[www.responsemicrowave.com](http://www.responsemicrowave.com)



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

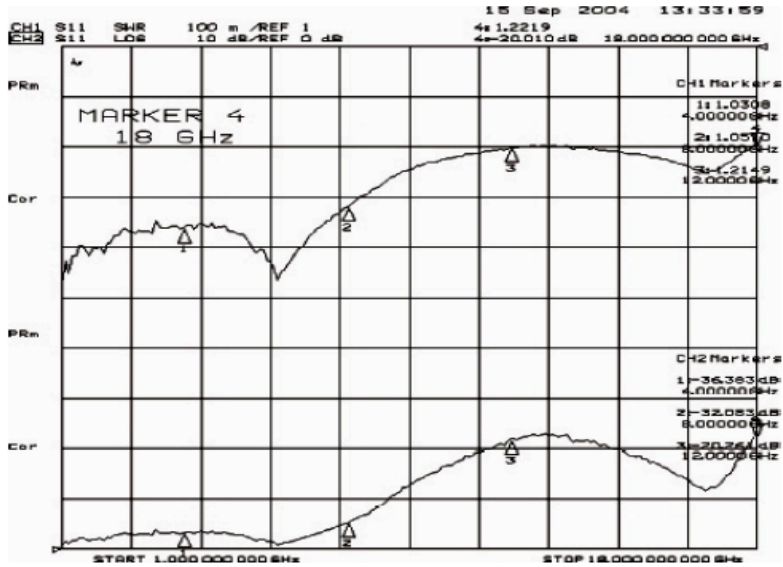

Telephone: 978-772-3767  
772-3768

Fax: 978-

[www.responsemicrowave.com](http://www.responsemicrowave.com)