



9 4 J A C K S O N R O A D , S U I T E 1 1 0 , D E V E N S , M A 0 1 4 3 4



TERMINATIONS

Model RMTE.18000Sm2
SMA male, Screw-on

FREQUENCY (MHz)	POWER (WATT)(max)	IMPEDANCE (Ω)	VSWR (max)
DC-18000	2	50	20 dB

Notes:

- a. Case Materials/Plating:
 Housing: Brass/gold plate
 Coupling Nut: brass/nickel plate
 Center Contact: Gold plated BeCu
 Resistive element: Thin film
 Resistor substrate: Alumina
- b. Operation temperature: -55C to +125C
- c. C suffix = 2" bead chain and eyelet

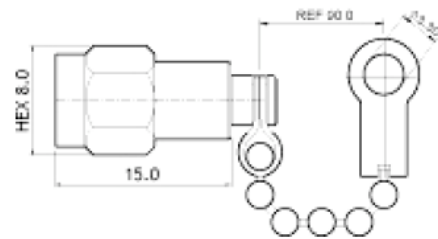

All specifications are subject to change without notice.

Telephone: 978-772-3767
 772-3768

Fax: 978-

www.responsemicrowave.com