



9 4 J A C K S O N R O A D , S U I T E 1 1 0 , D E V E N S , M A 0 1 4 3 4

## TERMINATIONS


Model RMTE.3000Nm50

N male, Screw-on

FREQUENCY (MHz)	POWER (WATT)(max)	IMPEDANCE ( $\Omega$ )	VSWR (max)	WEIGHT (grams)
DC-3000	50	50	1.15:1	350

### Notes:

- a. Case Materials/Plating:
  - Housing: Brass w/silver or ternary alloy
  - Flange: Aluminum w/black chromate
  - Insulator: PTFE
- b. Operation temperature: -40C to +85C deg

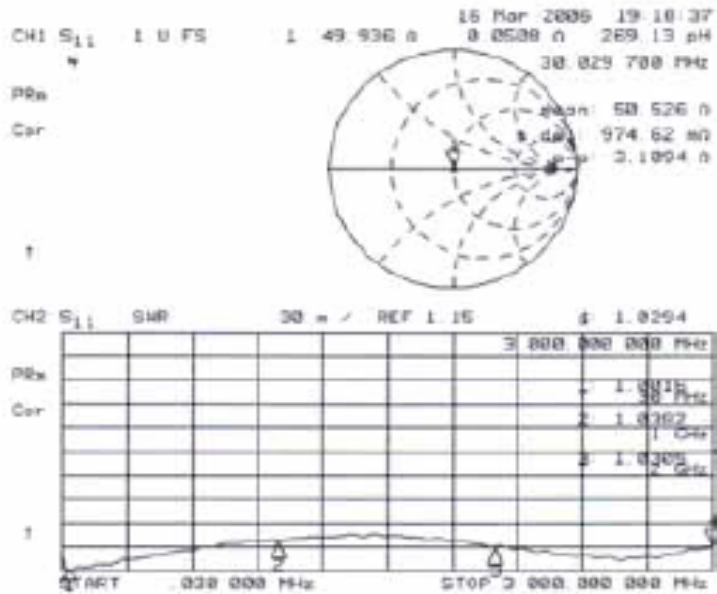

All specifications are subject to change without notice.

Telephone: 978-772-3767  
 772-3768

Fax: 978-

[www.responsemicrowave.com](http://www.responsemicrowave.com)