



9 4 J A C K S O N R O A D , S U I T E 1 1 0 , D E V E N S , M A 0 1 4 3 4


## TERMINATIONS

**Model RMTE.40000Kf0.5**  
**2.92mm female**

FREQUENCY (MHz)	POWER (WATT)(max)	IMPEDANCE ( $\Omega$ )	VSWR (max)
DC-40000	0.5	50	1.25:1

### Notes:

- a. Case Materials/Plating:  
 Housing: 303 stainless/passivate  
 Center Contact: BeCU/gold  
 Insulator: PTFE  
 O-ring: Silicone Rubber
- b. Operation temperature: -40C to +120C deg
- c. Add "C" suffix for 2" monel bead chain w/eyelet

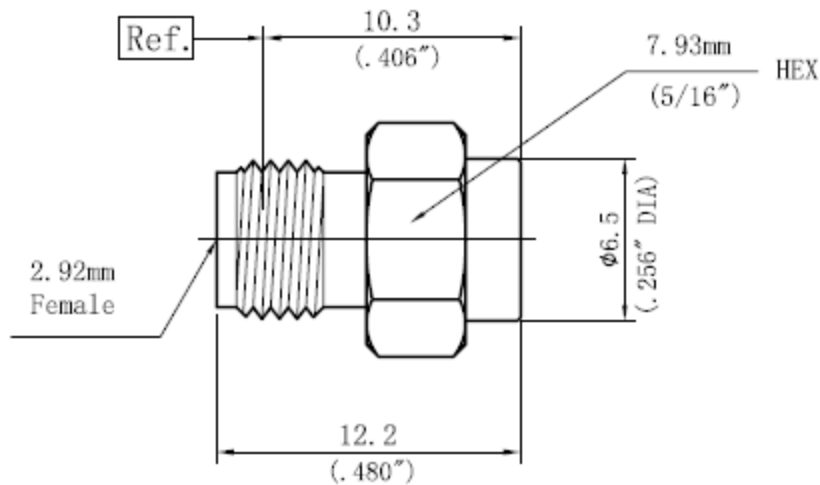

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767  
 772-3768

Fax: 978-

[www.responsemicrowave.com](http://www.responsemicrowave.com)