



9 4 J A C K S O N R O A D , S U I T E 1 1 0 , D E V E N S , M A 0 1 4 3 4

TERMINATIONS



Model RMTE.6000Nm2

N male, Screw-on

FREQUENCY (MHz)	POWER (WATT)(max)	PEAK POWER	IMPEDANCE (Ω)	VSWR (max)
DC-6000	2	1Kw/50us	50	1.25:1

Notes:

- a. Case Materials/Plating:
 - Housing: Brass w/ternary alloy
 - Center Contact: Gold plated brass per MIL-G-45204
 - Resistive element: Thin film
 - Resistor substrate: Alumina
- b. Operation temperature: -55C to +125C
- c. Add a "c" suffix for optional bead chain

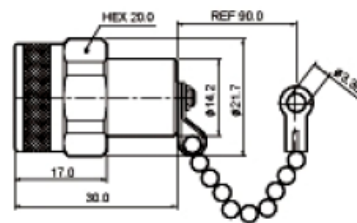

All specifications are subject to change without notice.

Telephone: 978-772-3767
772-3768

Fax: 978-

www.responsemicrowave.com