



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

Filters/Diplexers

Model RMDU.1850-1990Nf

DUPLEXER, N Female

SPECIFICATIONS

ITEM	Specification	
<i>Pass Band</i>	<i>Up Link</i>	<i>Down Link</i>
	1850~1910MHz	1930~1990MHz
<i>Pass Band Insertion Loss</i>	1.0dB Max.	
<i>Pass Band Ripple</i>	0.6dB Max.	
<i>Pass Band Return Loss</i>	15dB Min.	
<i>Rejection</i>	<i>DC~1830MHz</i> 50dB Min.	<i>DC~1910MHz</i> 75dB Min.
	1990~3980MHz 50dB Min.	2010~3980MHz 50dB Min.
<i>Isolation (Up Link / Down Link)</i>	75dB Min.	
<i>Power Handling</i>	50W CW	
<i>Operating Temperature</i>	-20 to +70°C	
<i>Operating Humidity</i>	0 to 95%	
<i>Connector</i>	N(F)	
<i>Size</i>	116 x 154 x40mm	
<i>Finish</i>	Black	


Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

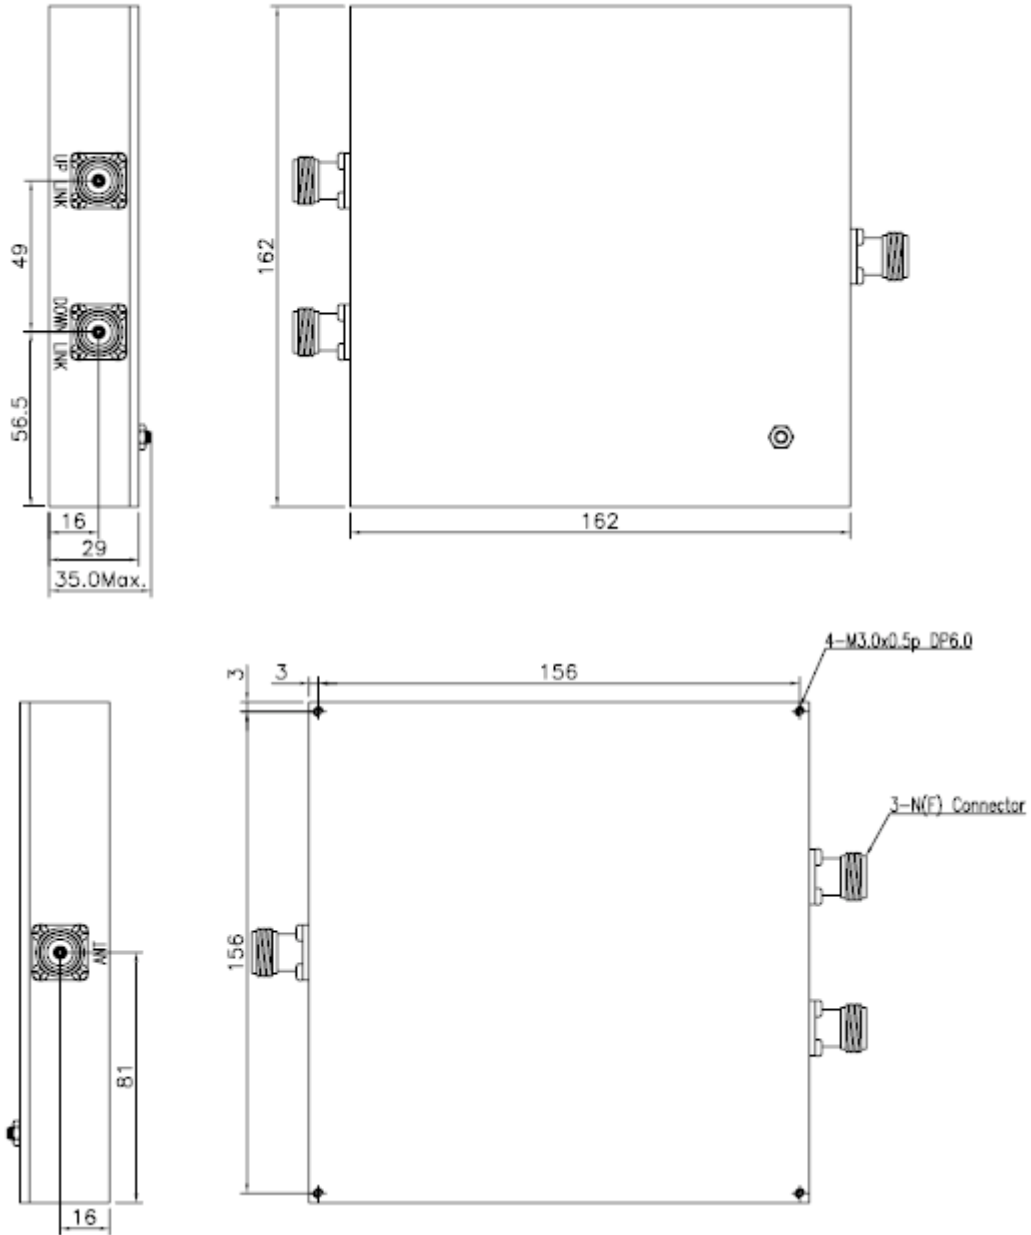

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com